


4½ in 13.5 lb/ft


Clearance: Standard

Label	Pin/Box	OD [mm]	ID [mm]	Min. Turning Length [mm]	Min. Boring Length [mm]	OD [in]	ID [in]	Min. Turning Length [in]	Min. Boring Length [in]
4½ in 13.5 lb/ft	Box	126.20 ± 0.50	98.38 ± 0.30	94.50	94.50	4.969 ± 0.020	3.873 ± 0.012	3.720	3.720
	Pin	114.59 ± 0.85	99.00 ± 0.30	100.68	100.68	4.511 ± 0.033	3.898 ± 0.012	3.964	3.964

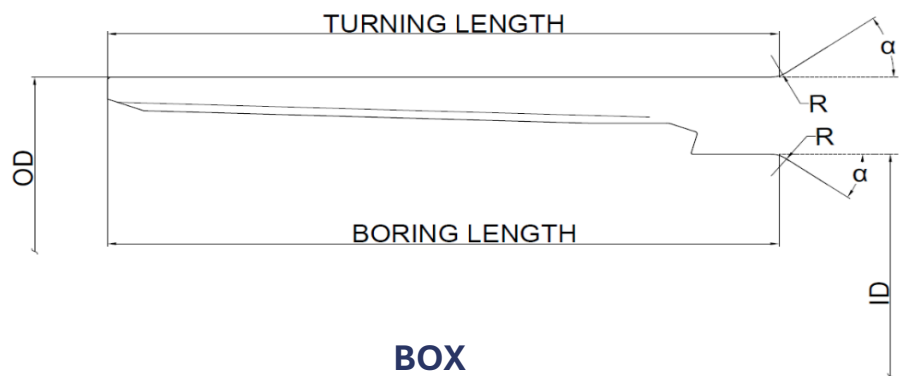

BOX

$$R_{\min} = 20 \text{ mm} = 0.79 \text{ in}$$

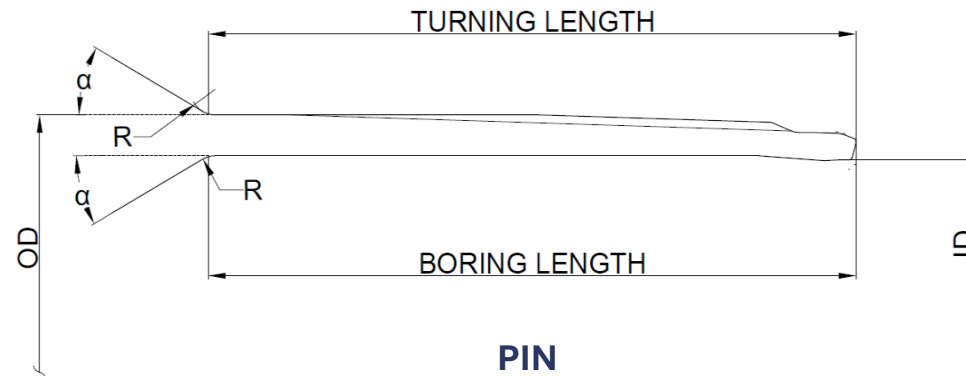

PIN

$$\alpha_{\min} = 30^{\circ}$$



www.sentinelconnections.com

PCBD-SENTINEL_One-4.5-13.5

Date of issue (dd/mm/yyyy): 14/11/2024

TUBACEX
GROUP