


5 in 21.4 lb/ft


Clearance: Standard

Label	Pin/Box	OD [mm]	ID [mm]	Min. Turning Length [mm]	Min. Boring Length [mm]	OD [in]	ID [in]	Min. Turning Length [in]	Min. Boring Length [in]
5 in 21.4 lb/ft	Box	144.55 ± 0.50	103.25 ± 0.30	132.00	132.00	5.691 ± 0.020	4.065 ± 0.012	5.197	5.197
	Pin	127.32 ± 0.95	103.90 ± 0.30	127.74	127.74	5.013 ± 0.037	4.091 ± 0.012	5.029	5.029

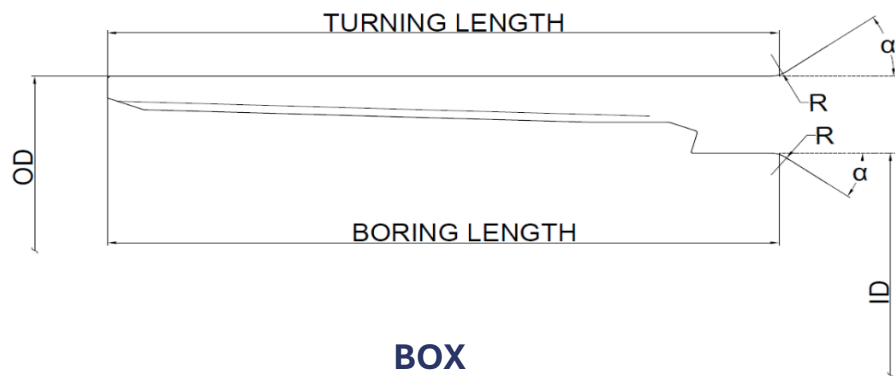

BOX

$$R_{\min} = 20 \text{ mm} = 0.79 \text{ in}$$

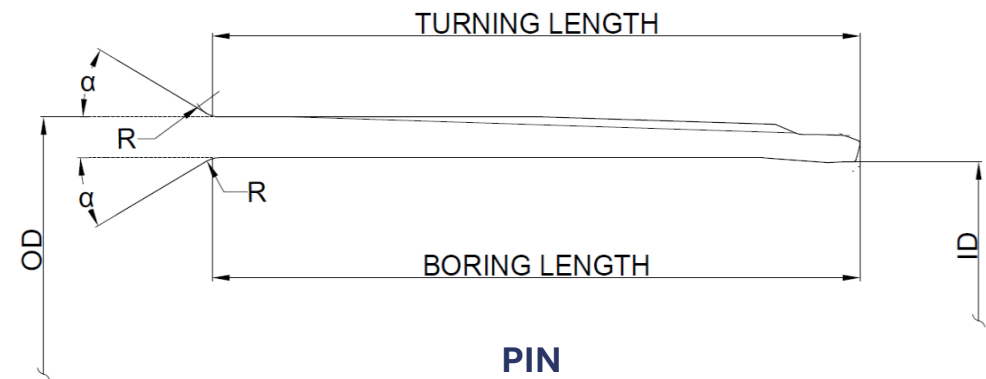

PIN

$$\alpha_{\min} = 30^{\circ}$$



www.sentinelconnections.com

PCBD-SENTINEL_One-5-21.4

Date of issue (dd/mm/yyyy): 14/11/2024

TUBACEX
GROUP