


## 5 in 23.3 lb/ft


Clearance: Standard

| Label           | Pin/Box | OD [mm]       | ID [mm]       | Min. Turning Length [mm] | Min. Boring Length [mm] | OD [in]       | ID [in]       | Min. Turning Length [in] | Min. Boring Length [in] |
|-----------------|---------|---------------|---------------|--------------------------|-------------------------|---------------|---------------|--------------------------|-------------------------|
| 5 in 23.3 lb/ft | Box     | 146.05 ± 0.50 | 101.15 ± 0.30 | 132.00                   | 132.00                  | 5.750 ± 0.020 | 3.982 ± 0.012 | 5.197                    | 5.197                   |
|                 | Pin     | 127.32 ± 0.95 | 99.54 ± 0.30  | 127.74                   | 127.74                  | 5.013 ± 0.037 | 3.919 ± 0.012 | 5.029                    | 5.029                   |

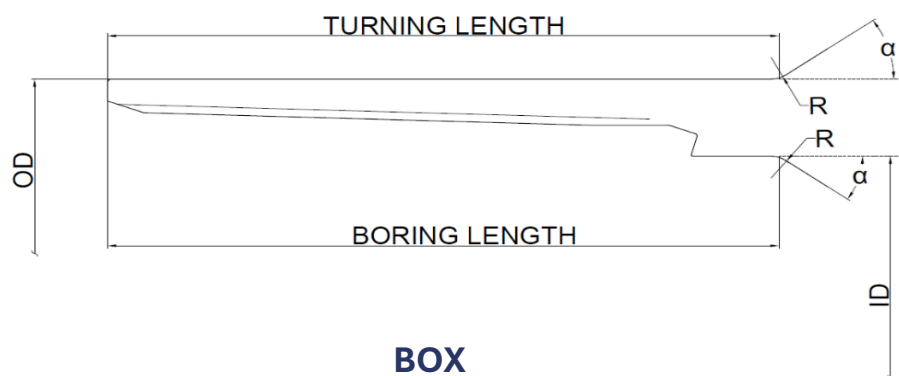

**BOX**

$$R_{\min} = 20 \text{ mm} = 0.79 \text{ in}$$

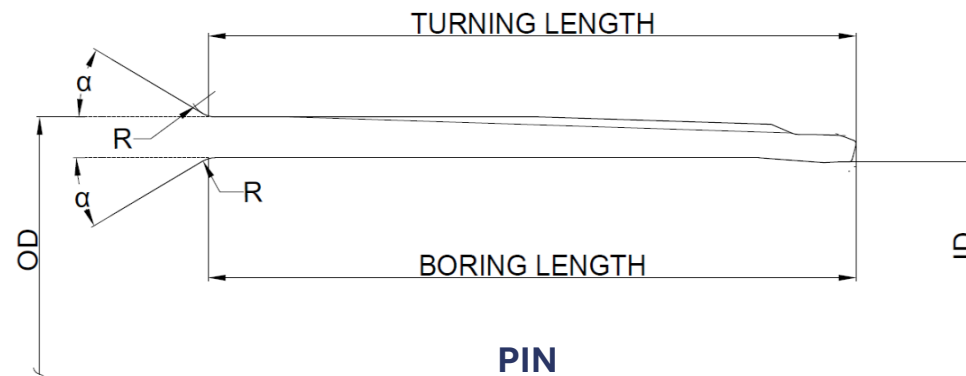

**PIN**

$$\alpha_{\min} = 30^\circ$$



[www.sentinelconnections.com](http://www.sentinelconnections.com)

PCBD-SENTINEL\_One-5-23.3

Date of issue (dd/mm/yyyy): 14/11/2024

**TUBACEX**  
GROUP