


6⁵/₈ in 20 lb/ft


Clearance: Standard

Label	Pin/Box	OD [mm]	ID [mm]	Min. Turning Length [mm]	Min. Boring Length [mm]	OD [in]	ID [in]	Min. Turning Length [in]	Min. Boring Length [in]
6 ⁵ / ₈ in 20 lb/ft	Box	185.00 ± 0.50	151.70 ± 0.30	138.00	138.00	7.283 ± 0.020	5.972 ± 0.012	5.433	5.433
	Pin	168.70 ± 1.26	154.40 ± 0.30	150.00	150.00	6.642 ± 0.050	6.079 ± 0.012	5.906	5.906

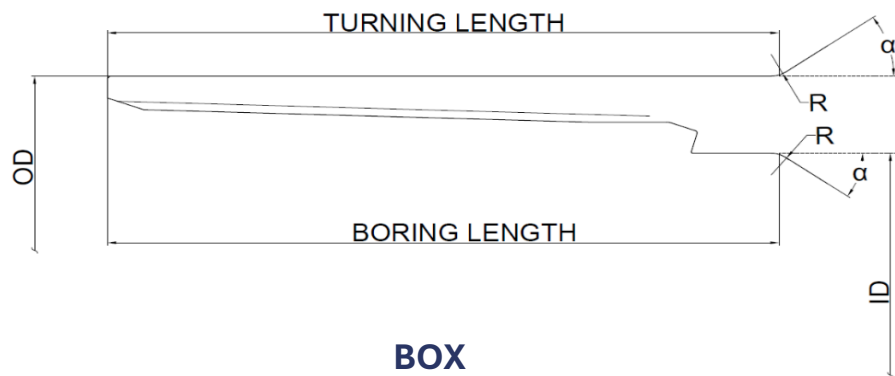

BOX

$$R_{\min} = 20 \text{ mm} = 0.79 \text{ in}$$

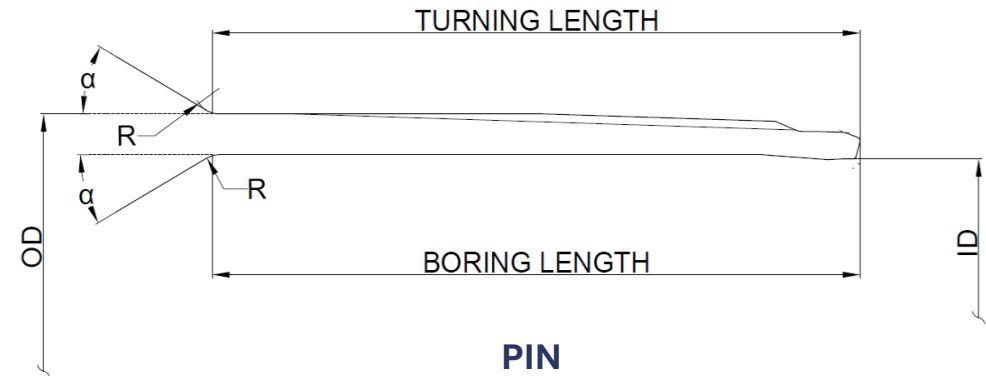

PIN

$$\alpha_{\min} = 30^{\circ}$$



www.sentinelconnections.com

PCBD-SENTINEL_One-6.625-20

Date of issue (dd/mm/yyyy): 14/11/2024

TUBACEX
GROUP