



6⁵/₈ in 28 lb/ft

Clearance: Standard

Label	Pin/Box	OD [mm]	ID [mm]	Min. Turning Length [mm]	Min. Boring Length [mm]	OD [in]	ID [in]	Min. Turning Length [in]	Min. Boring Length [in]
6 ⁵ / ₈ in 28 lb/ft	Box	185.40 ± 0.50	145.20 ± 0.30	138.00	138.00	7.299 ± 0.020	5.717 ± 0.012	5.433	5.433
	Pin	168.70 ± 1.26	143.92 ± 0.30	150.00	150.00	6.642 ± 0.050	5.666 ± 0.012	5.906	5.906

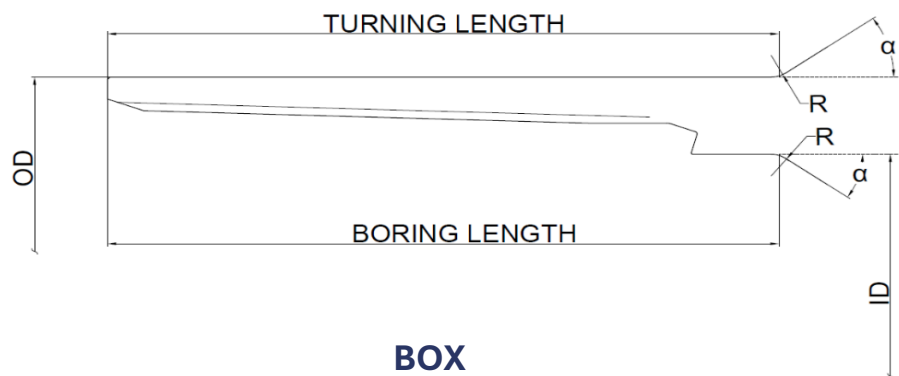

BOX

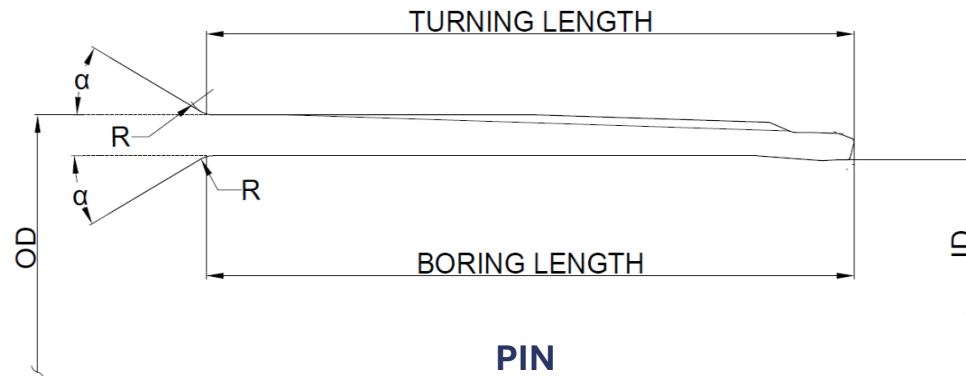

PIN

$$R_{\min} = 20 \text{ mm} = 0.79 \text{ in}$$

$$\alpha_{\min} = 30^{\circ}$$



www.sentinelconnections.com

PCBD-SENTINEL_One-6.625-28

Date of issue (dd/mm/yyyy): 14/11/2024

TUBACEX
GROUP