



6⁵/₈ in 32 lb/ft

Clearance: Standard

Label	Pin/Box	OD [mm]	ID [mm]	Min. Turning Length [mm]	Min. Boring Length [mm]	OD [in]	ID [in]	Min. Turning Length [in]	Min. Boring Length [in]
6 ⁵ / ₈ in 32 lb/ft	Box	188.80 ± 0.50	143.20 ± 0.30	138.00	138.00	7.433 ± 0.020	5.638 ± 0.012	5.433	5.433
	Pin	168.70 ± 1.26	140.97 ± 0.30	150.00	150.00	6.642 ± 0.050	5.550 ± 0.012	5.906	5.906

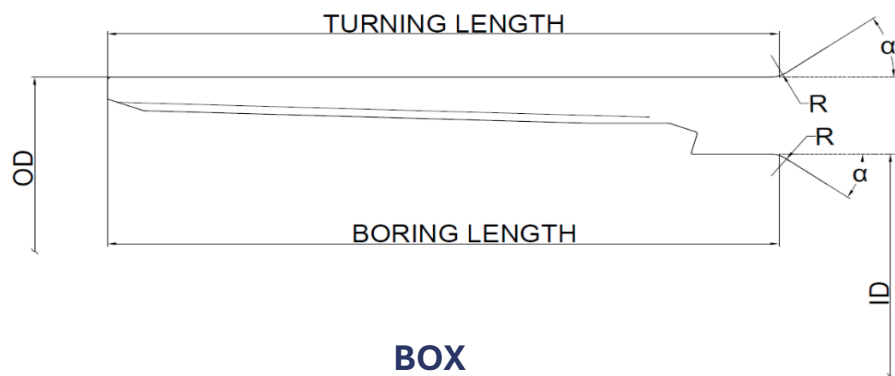

$$R_{\min} = 20 \text{ mm} = 0.79 \text{ in}$$

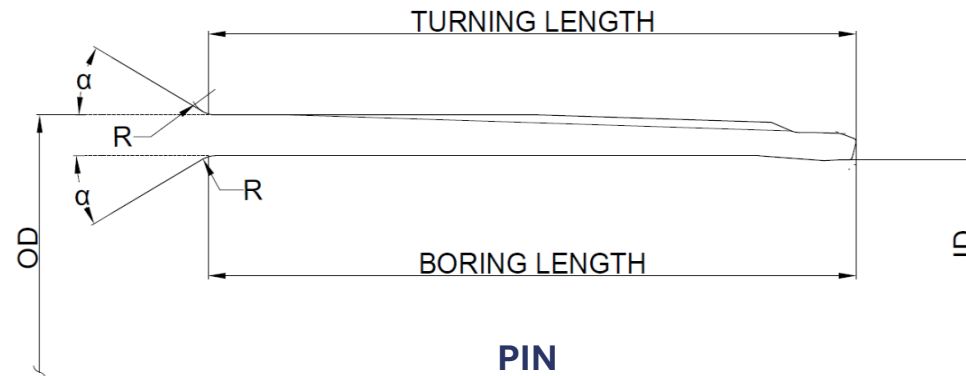

$$\alpha_{\min} = 30^{\circ}$$



www.sentinelconnections.com

PCBD-SENTINEL_One-6.625-32

Date of issue (dd/mm/yyyy): 14/11/2024

TUBACEX
GROUP