


7⁵/₈ in 29.7 lb/ft


Clearance: Standard

Label	Pin/Box	OD [mm]	ID [mm]	Min. Turning Length [mm]	Min. Boring Length [mm]	OD [in]	ID [in]	Min. Turning Length [in]	Min. Boring Length [in]
7 ⁵ / ₈ in 29.7 lb/ft	Box	208.60 ± 0.50	172.97 ± 0.30	149.00	149.00	8.213 ± 0.020	6.810 ± 0.012	5.866	5.866
	Pin	194.16 ± 1.45	173.70 ± 0.30	159.65	159.65	7.644 ± 0.057	6.839 ± 0.012	6.285	6.285

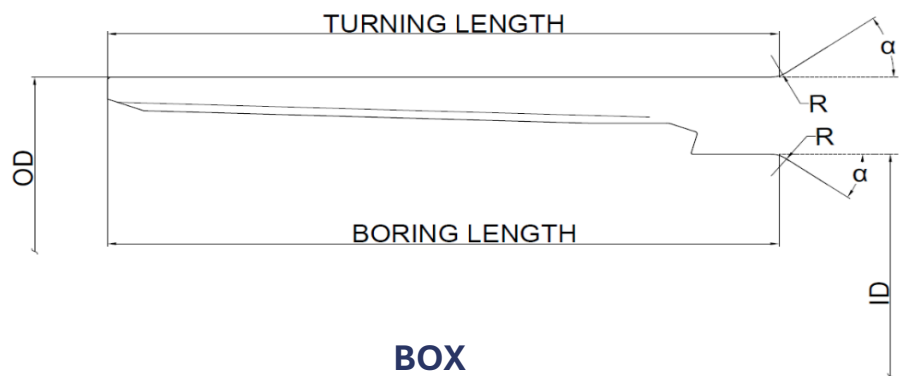

BOX

$$R_{\min} = 20 \text{ mm} = 0.79 \text{ in}$$

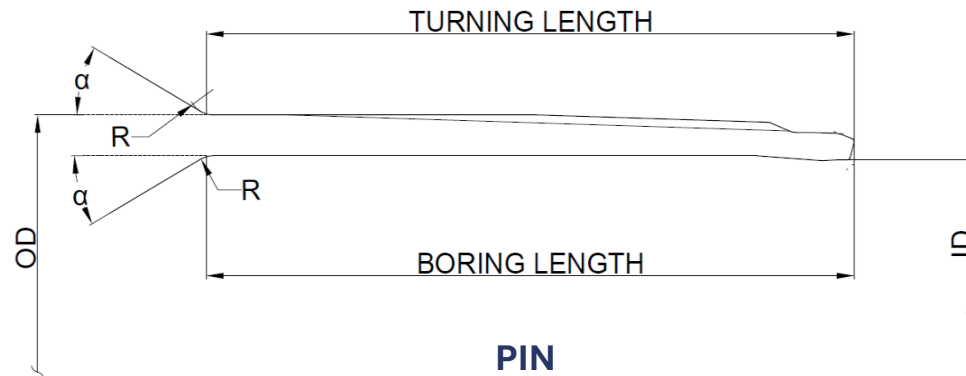

PIN

$$\alpha_{\min} = 30^{\circ}$$



www.sentinelconnections.com

PCBD-SENTINEL_One-7.625-29.7

Date of issue (dd/mm/yyyy): 14/11/2024

TUBACEX
GROUP