


## 7<sup>5</sup>/<sub>8</sub> in 39 lb/ft


Clearance: Standard

| Label                                     | Pin/Box | OD [mm]       | ID [mm]       | Min. Turning<br>Length [mm] | Min. Boring<br>Length [mm] | OD [in]       | ID [in]       | Min. Turning<br>Length [in] | Min. Boring<br>Length [in] |
|-------------------------------------------|---------|---------------|---------------|-----------------------------|----------------------------|---------------|---------------|-----------------------------|----------------------------|
| 7 <sup>5</sup> / <sub>8</sub> in 39 lb/ft | Box     | 213.85 ± 0.50 | 167.37 ± 0.30 | 149.00                      | 149.00                     | 8.419 ± 0.020 | 6.589 ± 0.012 | 5.866                       | 5.866                      |
|                                           | Pin     | 194.16 ± 1.45 | 168.10 ± 0.30 | 159.65                      | 159.65                     | 7.644 ± 0.057 | 6.618 ± 0.012 | 6.285                       | 6.285                      |

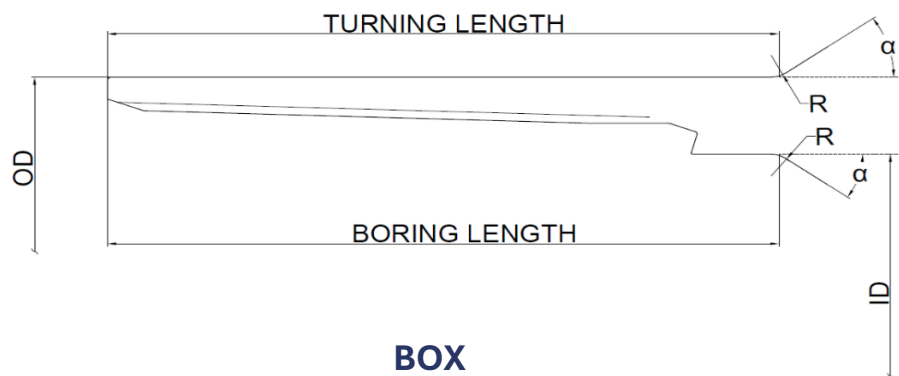

**BOX**

$$R_{\min} = 20 \text{ mm} = 0.79 \text{ in}$$

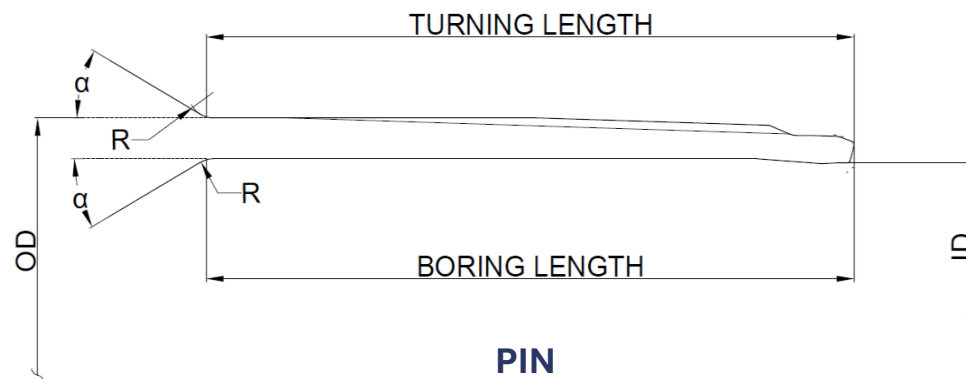

**PIN**

$$\alpha_{\min} = 30^{\circ}$$



[www.sentinelconnections.com](http://www.sentinelconnections.com)

PCBD-SENTINEL\_One-7.625-39

Date of issue (dd/mm/yyyy): 14/11/2024

**TUBACEX**  
GROUP