
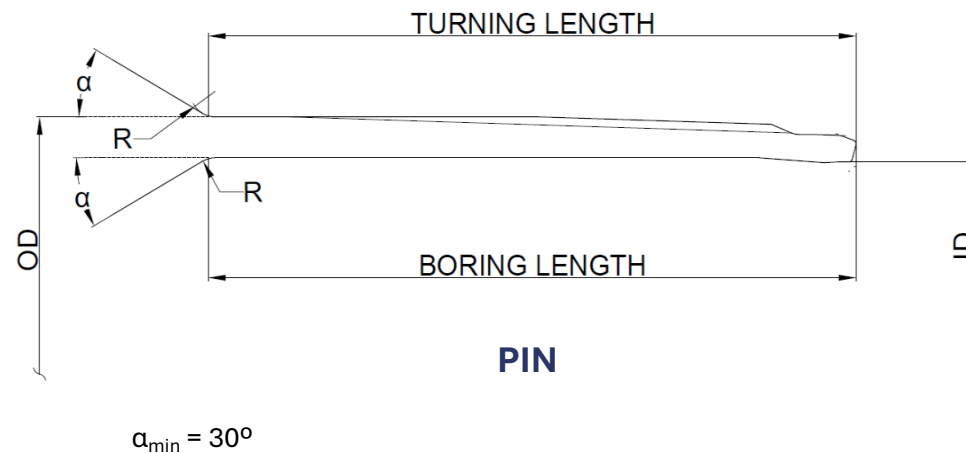


## 7 in 26 lb/ft

Clearance: Standard

| Label         | Pin/Box | OD [mm]       | ID [mm]       | Min. Turning Length [mm] | Min. Boring Length [mm] | OD [in]       | ID [in]       | Min. Turning Length [in] | Min. Boring Length [in] |
|---------------|---------|---------------|---------------|--------------------------|-------------------------|---------------|---------------|--------------------------|-------------------------|
| 7 in 26 lb/ft | Box     | 192.84 ± 0.70 | 157.51 ± 0.30 | 146.50                   | 146.50                  | 7.592 ± 0.028 | 6.201 ± 0.012 | 5.768                    | 5.768                   |
|               | Pin     | 178.24 ± 1.33 | 158.14 ± 0.30 | 152.40                   | 152.40                  | 7.018 ± 0.052 | 6.226 ± 0.012 | 6.000                    | 6.000                   |

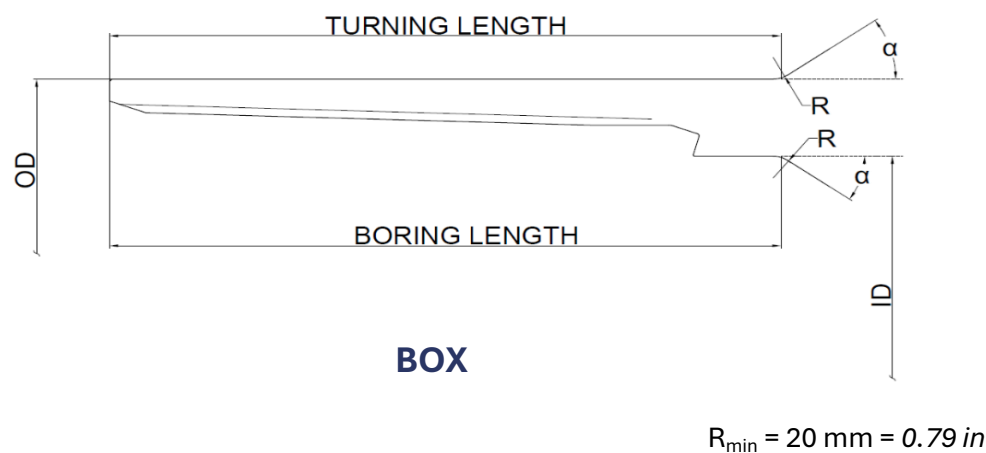

[www.sentinelconnections.com](http://www.sentinelconnections.com)

PCBD-SENTINEL\_One-7-26

Date of issue (dd/mm/yyyy): 14/11/2024

**TUBACEX**  
GROUP