


5½ in 26.8 lb/ft


Clearance: Standard

Label	Pin/Box	OD [mm]	ID [mm]	Min. Turning Length [mm]	Min. Boring Length [mm]	OD [in]	ID [in]	Min. Turning Length [in]	Min. Boring Length [in]
5½ in 26.8 lb/ft	Box	159.60 ± 0.50	112.63 ± 0.20	136.50	136.50	6.283 ± 0.020	4.434 ± 0.008	5.374	5.374
	Pin	140.05 ± 1.04	113.30 ± 0.25	134.50	134.50	5.514 ± 0.041	4.461 ± 0.010	5.295	5.295

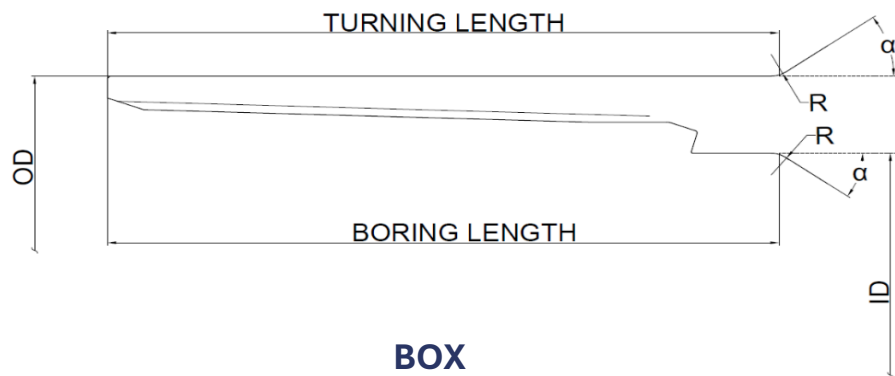

BOX

$$R_{\min} = 20 \text{ mm} = 0.79 \text{ in}$$

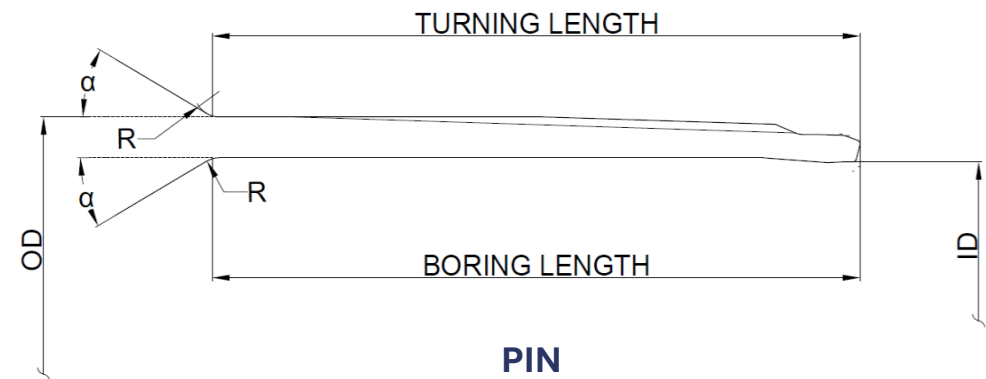

PIN

$$\alpha_{\min} = 30^\circ$$



www.sentinelconnections.com

PCBD-SENTINEL_One-5.5-26.8

Date of issue (dd/mm/yyyy): 14/11/2024

TUBACEX
GROUP