



7⁵/₈ in 42.8 lb/ft

Clearance: Standard

Label	Pin/Box	OD [mm]	ID [mm]	Min. Turning Lenght [mm]	Min. Boring Lenght [mm]	OD [in]	ID [in]	Min. Turning Lenght [in]	Min. Boring Lenght [in]
7 ⁵ / ₈ in 42.8 lb/ft	Box	216.35 ± 0.50	164.57 ± 0.30	149.00	149.00	8.518 ± 0.020	6.479 ± 0.012	5.866	5.866
	Pin	194.16 ± 1.45	165.30 ± 0.30	159.65	159.65	7.644 ± 0.057	6.508 ± 0.012	6.285	6.285

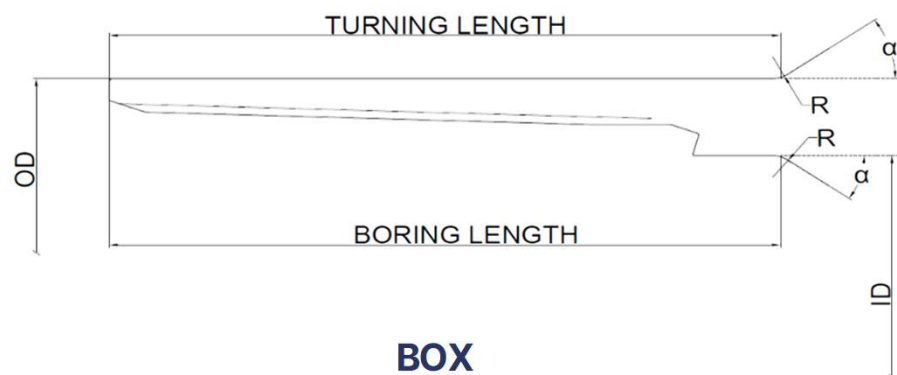

BOX

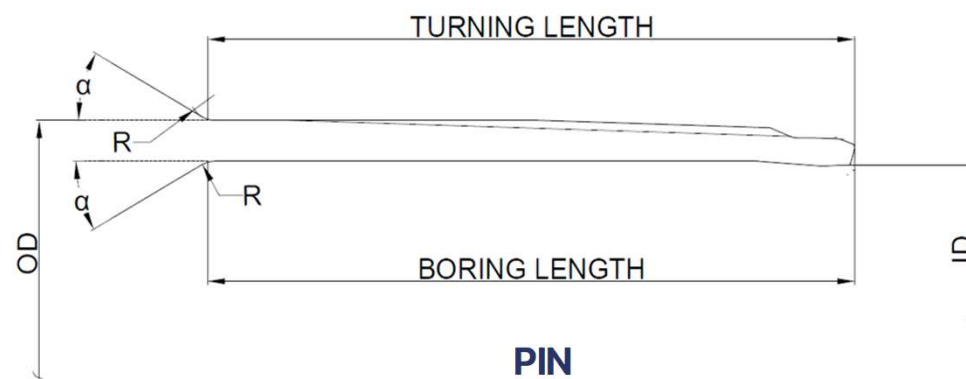

PIN

$$R_{\min} = 20 \text{ mm} = 0.79 \text{ in}$$

$$\alpha_{\min} = 30^\circ$$



www.sentinelconnections.com

PCBD-SENTINEL_One-7.625-42.8

Date of issue (dd/mm/yyyy): 18/07/2025

TUBACEX
GROUP