
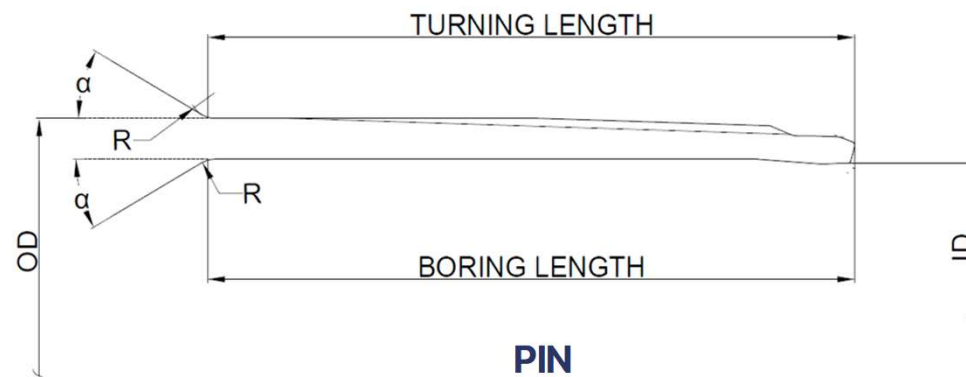


7 in 26 lb/ft

Clearance: Standard

Label	Pin/Box	OD [mm]	ID [mm]	Min. Turning Lenght [mm]	Min. Boring Lenght [mm]	OD [in]	ID [in]	Min. Turning Lenght [in]	Min. Boring Lenght [in]
7 in 26 lb/ft	Box	192.84 ± 0.70	157.51 ± 0.30	146.50	146.50	7.592 ± 0.028	6.201 ± 0.012	5.768	5.768
	Pin	178.24 ± 1.33	158.14 ± 0.30	152.40	152.40	7.018 ± 0.052	6.226 ± 0.012	6.000	6.000

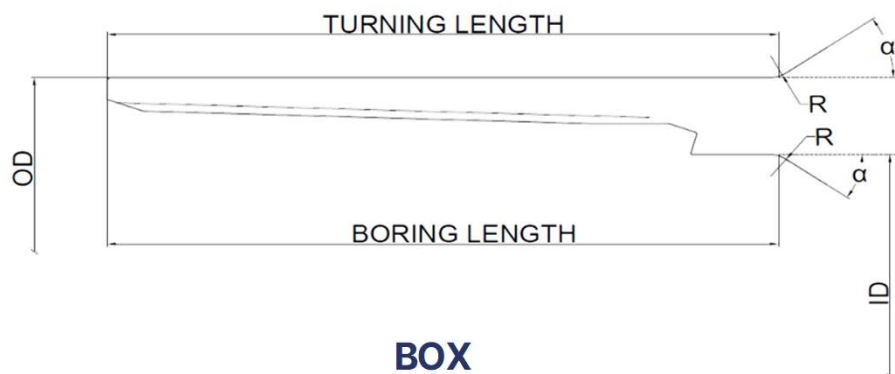

$$R_{\min} = 20 \text{ mm} = 0.79 \text{ in}$$

$$\alpha_{\min} = 30^\circ$$



www.sentinelconnections.com

PCBD-SENTINEL_One-7-26

Date of issue (dd/mm/yyyy): 18/07/2025

TUBACEX
GROUP