
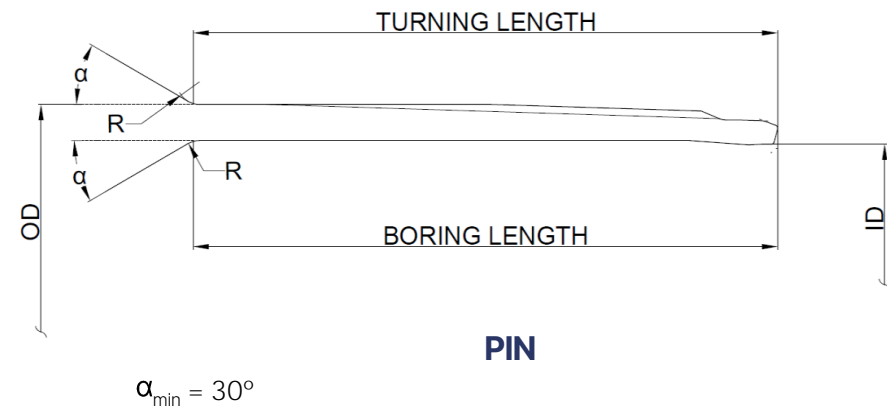


## 10<sup>3</sup>/<sub>4</sub> in 55.5 lb/ft

Clearance: Standard

Label	Pin/Box	OD [mm]	ID [mm]	Min. Turning Length [mm]	Min. Boring Length [mm]	OD [in]	ID [in]	Min. Turning Length [in]	Min. Boring Length [in]
10 <sup>3</sup> / <sub>4</sub> in 55.5 lb/ft	BOX	294.50 ± 0.50	247.40 ± 0.30	164.00	164.00	11.594 ± 0.020	9.740 ± 0.012	6.457	6.457
	PIN	273.73 ± 2.04	248.40 ± 0.30	169.20	169.20	10.777 ± 0.080	9.780 ± 0.012	6.661	6.661

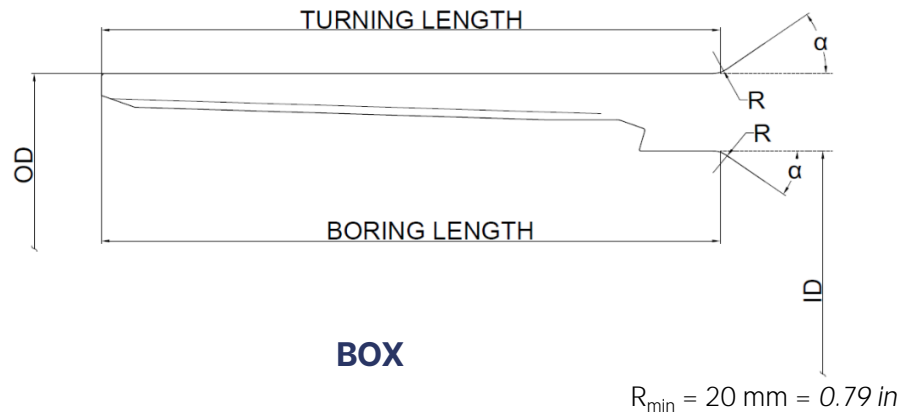

[www.sentinelconnections.com](http://www.sentinelconnections.com)

PCBD-SENTINEL\_Prime-10.75-55.5

Date of issue (dd/mm/yyyy): 31/03/2026