



13³/₈ in 68 lb/ft

Clearance: Standard

Label	Pin/Box	OD [mm]	ID [mm]	Min. Turning Length [mm]	Min. Boring Length [mm]	OD [in]	ID [in]	Min. Turning Length [in]	Min. Boring Length [in]
13 ³ / ₈ in 68 lb/ft	BOX	362.37 ± 0.50	314.30 ± 0.20	166.00	166.00	14.267 ± 0.020	12.374 ± 0.008	6.535	6.535
	PIN	340.57 ± 2.54	315.50 ± 0.20	169.20	169.20	13.408 ± 0.100	12.421 ± 0.008	6.661	6.661

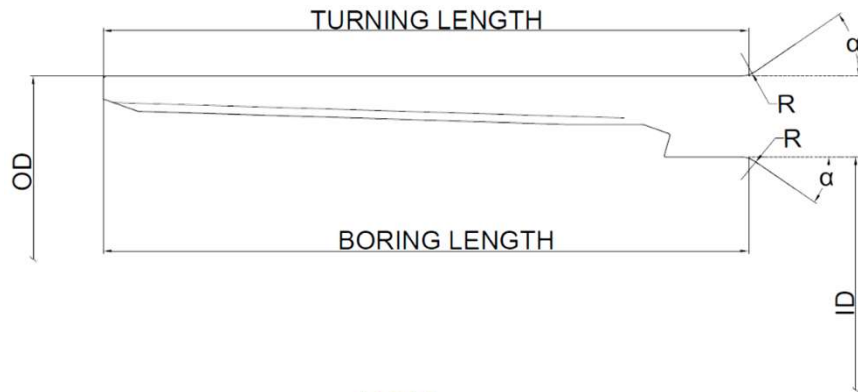

BOX

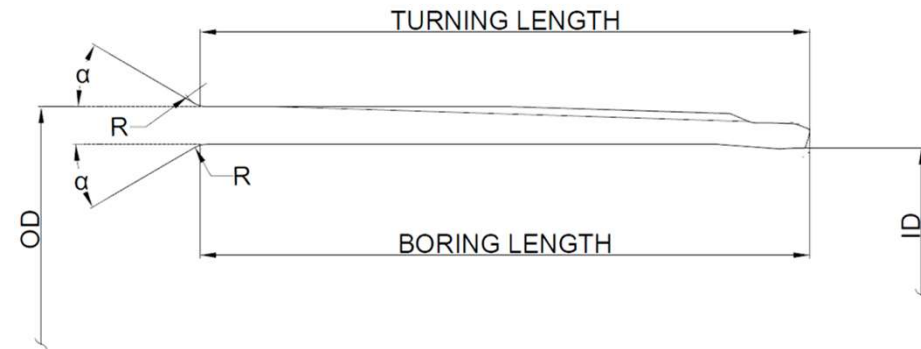

PIN

$$R_{\min} = 20 \text{ mm} = 0.79 \text{ in}$$

$$\alpha_{\min} = 30^\circ$$



www.sentinelconnections.com

PCBD-SENTINEL_Prime-13.375-68

Date of issue (dd/mm/yyyy): 18/07/2025

TUBACEX
GROUP