
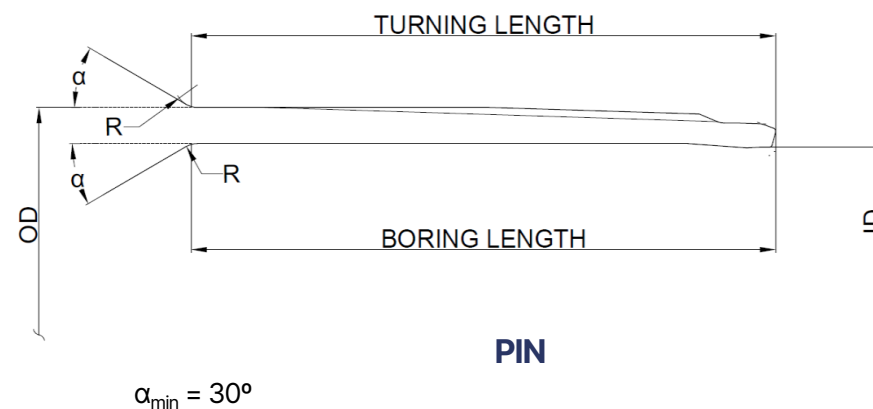


5½ in 23 lb/ft

Clearance: Standard

Label	Pin/Box	OD [mm]	ID [mm]	Min. Turning Length [mm]	Min. Boring Length [mm]	OD [in]	ID [in]	Min. Turning Length [in]	Min. Boring Length [in]
5½ in 23 lb/ft	BOX	156.99 ± 0.50	116.91 ± 0.25	133.00	133.00	6.181 ± 0.020	4.603 ± 0.010	5.236	5.236
	PIN	140.05 ± 1.04	117.71 ± 0.25	138.00	138.00	5.514 ± 0.041	4.634 ± 0.010	5.433	5.433

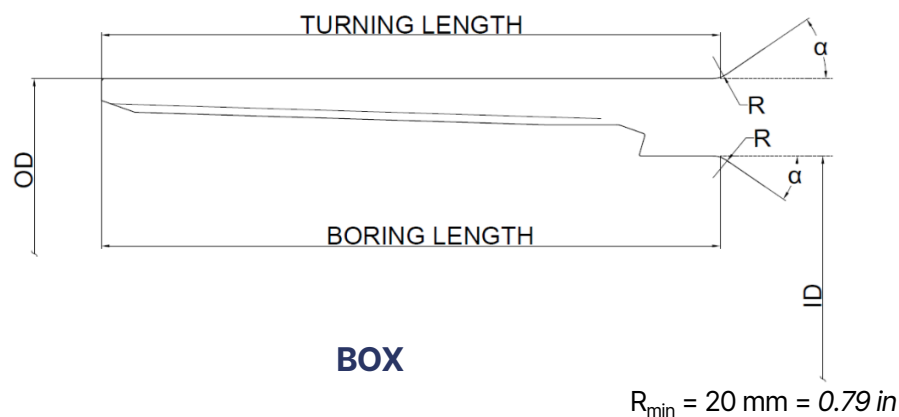

BOX min. recut length:

PIN min. recut length:



www.sentinelconnections.com

PCBD-SENTINEL_Prime-5.5-23

Date of issue (dd/mm/yyyy): 15/10/2025

TUBACEX
GROUP