



9⁵/₈ in 47 lb/ft

Clearance: Standard

Label	Pin/Box	OD [mm]	ID [mm]	Min. Turning Length [mm]	Min. Boring Length [mm]	OD [in]	ID [in]	Min. Turning Length [in]	Min. Boring Length [in]
9 ⁵ / ₈ in 47 lb/ft	BOX	266.76 ± 0.50	219.30 ± 0.20	162.50	162.50	10.502 ± 0.020	8.634 ± 0.008	6.398	6.398
	PIN	245.09 ± 1.83	220.30 ± 0.20	166.80	166.80	9.649 ± 0.072	8.673 ± 0.008	6.567	6.567

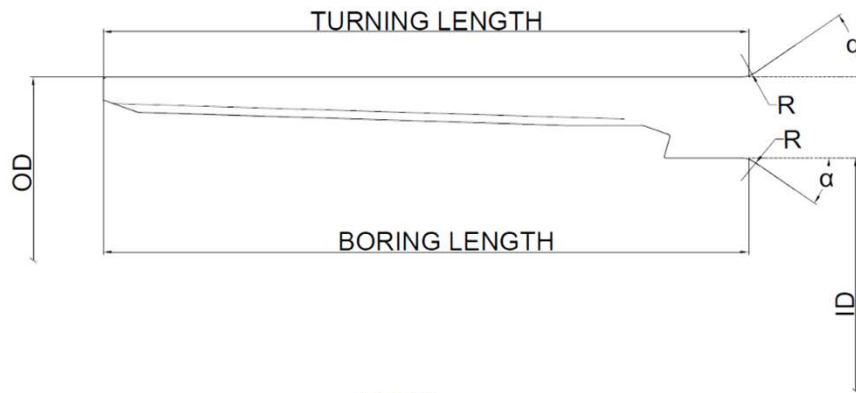

BOX

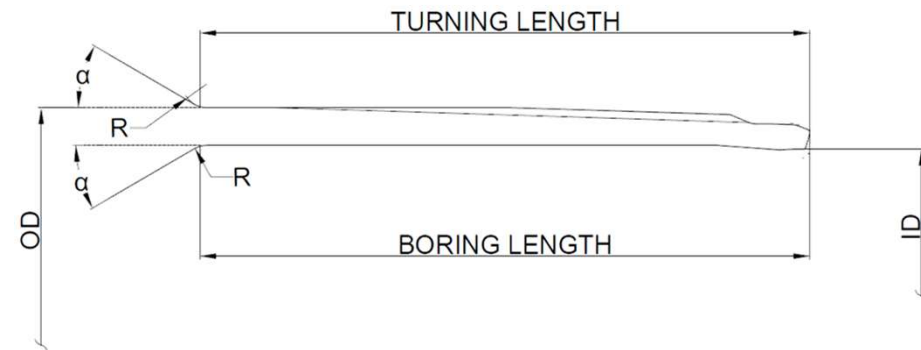

PIN

$$R_{\min} = 20 \text{ mm} = 0.79 \text{ in}$$

$$\alpha_{\min} = 30^\circ$$



www.sentinelconnections.com

PCBD-SENTINEL_Prime-9.625-47

Date of issue (dd/mm/yyyy): 18/07/2025

TUBACEX
GROUP